

CCO: 149 Suppl. No. 0 Contract No. 04 - 0120F4 Road SF-80-13.2/13.9 FED. AID LOC.:

To: **AMERICAN BRIDGE/FLUOR ENTERPRISES INC A JOINT VENTURE**

You are directed to make the following changes from the plans and specifications or do the following described work not included in the plans and specifications for this contract. **NOTE: This change order is not effective until approved by the Engineer.**

Description of work to be done, estimate of quantities and prices to be paid. (Segregate between additional work at contract price, agreed price and force account.) Unless otherwise stated, rates for rental of equipment cover only such time as equipment is actually used and no allowance will be made for idle time. This last percentage shown is the net accumulated increase or decrease from the original quantity in the Engineer's Estimate.


Extra Work at Lump Sum:

Apply primer paint coat to the galvanized and Dacromet or Geomet coated bolts prior to applying the finish paint in all instances, as directed by the Engineer.

Revise Special Provisions Section 10-1.59 "STEEL STRUCTURES," subsection "FABRICATION," subsection "BOLTED CONNECTIONS," bullet P paragraphs 5 and 6 as follows:

After installation, all exposed areas of galvanized bolts shall be cleaned in accordance with the requirements of SSPC-SP 2, and coated with two applications of unthinned organic zinc-rich primer that is compatible with the polysiloxane finish coats within 96 hours of installation. ~~Where polysiloxane finish coats are to be applied within 96 hours, this requirement need not apply.~~

After installation, all accessible exposed areas of bolts coated with Dacromet or Geomet, as determined by the Engineer shall be coated with a primer recommended by the manufacturer of the polysiloxane finish coat. Surface preparation shall be as recommended by the manufacturer of the primer or finish coat. ~~Where polysiloxane finish coats will be applied within 6 months, this requirement need not apply.~~

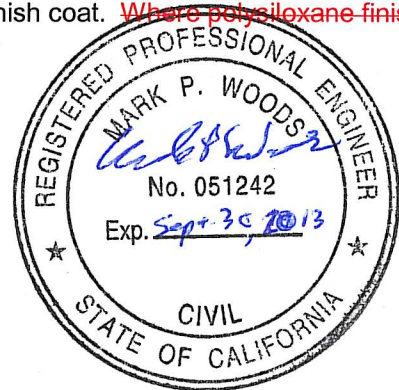

For this work, the Contractor will receive a lump sum price of \$728,312.00. This sum constitutes full and complete compensation for furnishing all labor, material, tools and incidentals including all markups by reason of this change.

Extra Work at Lump Sum..... \$728,312.00

Estimated Cost: Increase ☒ Decrease ☐ \$728,312.00

By reason of this order the time of completion will be adjusted as follows: 0 Days

Submitted by
Signature Resident Engineer
Kannu Balan, Senior T.E. Date 11-29-11

Approval Recommended by
Signature Supervising Transportation Engineer
William Casey, Sup. T.E. Date 11-29-11

Engineer Approval by
Signature Supervising Transportation Engineer
William Casey, Sup. T.E. Date 1-9-12

We the undersigned contractor, have given careful consideration to the change proposed and agree, if this proposal is approved, that we will provide all equipment, furnish the materials, except as otherwise be noted above, and perform all services necessary for the work above specified, and will accept as full payment therefor the prices shown above.

NOTE: If you, the contractor, do not sign acceptance of this order, your attention is directed to the requirements of the specifications as to proceeding with the ordered work and filing a written protest within the time therein specified.

Contractor Acceptance by
Signature (Print name and title) **BRIAN A PETERSEN - PROJECT DIRECTOR** Date 03 JAN 12